



# 109

## HOOK ON SIDESHIFT ISO3

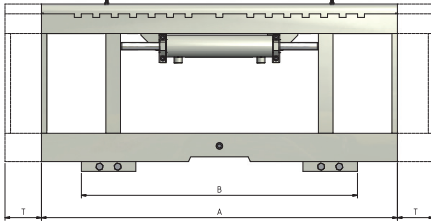

Attachments designed to move the load in transvers direction than forklift way, to ease the grab and deposit of the load without making annoying operations with the forklift.

REFERENCE	ATTACHMENT CAPACITY	LOAD CENTRE	ISO 2328 FEM	CARRIAGE WIDTH		STROKE	THICKNESS	CENTER OF GRAVITY CG - mm	WEIGHT Q - Kg
	P - Kg	CC - mm		A - mm	B - mm				
<b>03HLL3C3008</b>	5000	500	III	1150	1000	100	75	40	103
<b>03HLL3C3010</b>	5000	500	III	1255	1100	100	75	41	110
<b>03HLL3C3014</b>	5000	500	III	1350	1200	100	75	42	118
<b>03HLL3C3018</b>	5000	500	III	1560	1540	100	75	42	130
<b>03HLL3C3020</b>	5000	500	III	1660	1640	100	75	43	137



Hydraulic functions required: 1.  
Maximum working pressure: 200 bar.

The references indicated on table are relative to standard attachments.  
For the position of hydraulic connection see detail below.

