



209

HOOK ON SIDESHIFT ISO2

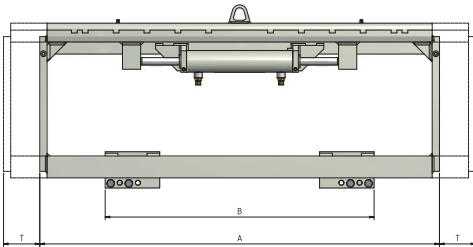

Attachments designed to move the load in transvers direction than forklift way, to easily the grab and deposit of the load without making annoying operations with the forklift.

REFERENCE	ATTACHMENT CAPACITY	LOAD CENTRE	ISO 2328 FEM	CARRIAGE WIDTH	MINIMUM FORK CARRIAGE	STROKE	THICKNESS	CENTER OF GRAVITY	WEIGHT
	P - Kg	CC - mm		A - mm	B - mm	T - mm	S - mm	CG - mm	
03LFA2C3001	2500	500	II	920	860	100	63	34	48
03LFA2C3008	2500	500	II	970	910	100	63	35	49
03LFA2C3003	2500	500	II	1000	940	100	63	36	50
03LFA2C3004	2500	500	II	1020	960	100	63	36	51
03LFA2C3005	2500	500	II	1040	980	100	63	36	52
03LFA2C3006	2500	500	II	1100	1040	100	63	37	55
03LFA2C3007	2500	500	II	1150	1090	100	63	38	57



Hydraulic functions required: 1.
Maximum working pressure: 200 bar.

The references indicated on table are relative to standard attachments.
For the position of hydraulic connection see detail below.

