


474.130

BALE CLAMP WITH WAVY EDGED ARMS

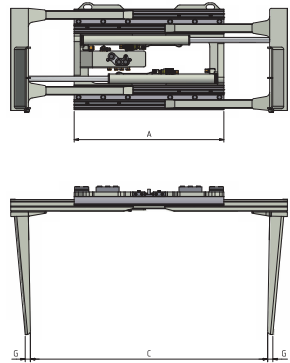

Series 130 clamps, with wavy edged arms, are particularly indicated for customers that need to move voluminous loads of every type. Clamping strength, adjustable through a hydraulic valve, allow to safely move the load; pressure relief valve, non-return valve and regenerative valve are supplied as standard. Minimum and maximum opening can be adapted to different needs as also dimension and length of the arms. Upon request supplied with side shifting valve or semi-integral side shift.

REFERENCE	ATTACHMENTS	LOAD	ISO	FRAME	OPENING		BLADES	THICKNESS	CENTER OF	WEIGHT
	CAPACITY				CENTRE	RANGE				
	P - Kg	CC - mm	2328	WIDTH	C MIN - mm	C MAX - mm	GxHxL mm	S - mm	CG - mm	Q - Kg
11L08AQ2A0001	1200	500	II	850	300	1340	30x350x900	109	218	254
11L08AQ2A0002	1200	500	II	950	400	1640	30x350x900	109	214	263
11L08AQ2A0003	1200	500	II	1050	500	1940	30x350x900	109	214	270
11L088E2A0001	1400	500	II	950	320	1470	40x400x1000	137	253	390
11L088E2A0002	1400	500	II	1050	420	1770	40x400x1000	137	248	406
11L088E2A0003	1400	500	II	1150	520	2070	40x400x1000	137	242	422
11L088E2A0004	1400	500	II	1250	420	1970	40x400x1000	137	236	427
11L08CG2A0001	1700	500	II	950	320	1470	40x400x1000	137	253	390
11L08CG2A0002	1700	500	II	1050	420	1770	40x400x1000	137	248	430
11L08D62A0001	1900	500	II	1050	290	1540	40x400x1000	137	251	412
11L08D62A0002	1900	500	II	1150	390	1840	40x400x1000	137	247	426
11L08D62A0003	1900	500	II	1250	490	2140	40x400x1000	137	242	440
11L08D62A0004	1900	500	II	1350	590	2440	40x400x1000	137	238	454
11L08EY3A0001	2400	500	III	1050	290	1540	40x400x1000	137	251	420
11L08EY3A0002	2400	500	III	1150	390	1840	40x400x1000	137	247	426
11L08G03A0001	2700	500	III	1100	410	1780	40x400x1000	157	271	542
11L08G03A0002	2700	500	III	1100	400	1770	40x400x1200	157	334	588
11L08G03A0003	2700	500	III	1200	310	1680	40x400x1000	157	265	568
11L08G03A0004	2700	500	III	1200	300	1670	40x400x1200	157	321	614
11L08G03A0005	2700	500	III	1300	410	1980	40x400x1000	157	259	594
11L08G03A0006	2700	500	III	1300	400	1970	40x400x1200	157	316	640
11L08G03A0007	2700	500	III	1400	510	2280	40x400x1000	157	255	620
11L08G03A0008	2700	500	III	1400	500	2270	40x400x1200	157	310	668
11L08HY3A0001	3500	500	III	1200	300	1710	40x500x1200	167	368	758
11L08HY3A0002	3500	500	III	1200	290	1700	40x500x1500	167	453	855
11L08HY3A0003	3500	500	III	1300	400	2010	40x500x1200	167	361	784
11L08HY3A0004	3500	500	III	1300	390	2000	40x500x1500	167	447	881
11L08HY3A0005	3500	500	III	1400	500	2310	40x500x1200	167	354	810
11L08HY3A0006	3500	500	III	1400	490	2300	40x500x1500	167	438	907



Hydraulic functions required: 1.
Maximum working pressure: 175 bar.

The references indicated on table are relative to standard attachments.
For the position of hydraulic connection see detail below.

