


505

PUSH-PULL WITH SHEET RETENTION

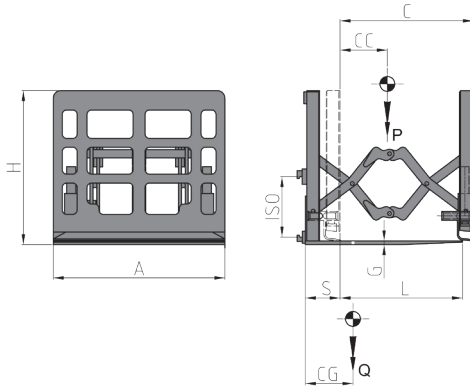


Series 505 Push-Pulls are designed to move load not on pallets and allow to recover sheets of paper, carton or plastic. The elimination of the pallet, over than reduce the cost of the packaging, allows to increase the volume of the goods movable, moreover in case of containers and to reduce amount of space in warehousing. Range of capacities and strokes of push-pulls can be adapted to each customer's need; disposable also without side shifting movement and without sheet retention.

REFERENCE	ATTACHMENTS CAPACITY		LOAD CENTRE CC - mm	ISO 2328 FEM	STROKE C - mm	HEIGHT H - mm	LOADING PLATE			THICKNESS S - mm	CENTER OF GRAVITY CG - mm	WEIGHT Q - Kg
	P - Kg						A - mm	L - mm	G - mm			
33B2J2A2001	1000		550	II	1120	1000	1200	1070	20	270	235	650
33B2J2A2002	1000		650	II	1270	1100	1200	1220	20	270	245	720
33B2U2A2001	1500		550	II	1120	1000	1250	1070	25	275	240	760
33B2U3A2002	1500		650	III	1270	1100	1250	1220	25	275	250	830
33B343A2001	2000		550	III	1120	1000	1250	1070	30	300	270	870
33B343A2002	2000		650	III	1270	1100	1250	1220	30	300	280	970



Hydraulic functions required: 1+1 electric.
Maximum working pressure: 175 bar.

The references indicated on table are relative to standard attachments.



The positioning of the hydraulic connection is defined with the client during the definition of the order.