


600 LOAD EXTENDER




Series 600 Load Extenders are designed to arrange goods on pallet in double depth, particularly indicated to stock in double row or load of the truck on just one side when narrow spaces avoid other manoeuvres. Range of capacities and strokes of load extenders can be adapted to each customer's need.

REFERENCE	ATTACHMENTS	ATTACHMENTS	LOAD CENTRE	ISO 2328 BACK	ISO 2328 FRONT	STROKE	FRAME DIMENSIONS	CARRIAGE WIDTH	THICKNESS	CENTER OF GRAVITY CLOSED	CENTER OF GRAVITY EXTENDED	WEIGHT
	CAPACITY CLOSED	CAPACITY EXTENDED										
37ABS2C0002	1500	800	500	II	II	950	800x1000	980	320	165	645	580
37ABS2C0003	1500	800	500	II	II	1200	800x1000	980	320	165	770	580
37ABS2C0004	1500	800	500	II	II	950	800x1000	1100	320	170	650	600
37ABS2C0005	1500	800	500	II	II	1200	800x1000	1100	320	170	775	600
37AFA7C0001	2500	1300	500	III	II	950	800x1000	1100	330	170	650	615
37AFA7C0002	2500	1300	500	III	II	1200	800x1000	1100	330	170	780	615
37AFA7C0003	2500	1300	500	III	II	950	800x1000	1300	330	175	670	650
37AFA7C0004	2500	1300	500	III	II	1200	800x1000	1300	330	175	795	650
37AJU3C0006	4000	2000	500	III	III	950	800x1000	1300	350	185	675	640
37AJU3C0007	4000	2000	500	III	III	1200	800x1000	1300	350	185	800	910
37AJU3C0008	4000	2000	500	III	III	950	800x1000	1650	350	200	685	960
37AJU3C0009	4000	2000	500	III	III	1200	800x1000	1650	350	200	810	960

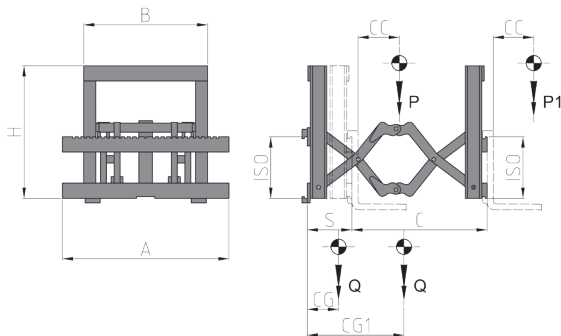

Hydraulic functions required: 1.
Maximum working pressure: 175 bar.

The references indicated on table are relative to standard attachments.



The positioning of the hydraulic connection is defined with the client during the definition of the order.