


918

TRIPLE FORK POSITIONER

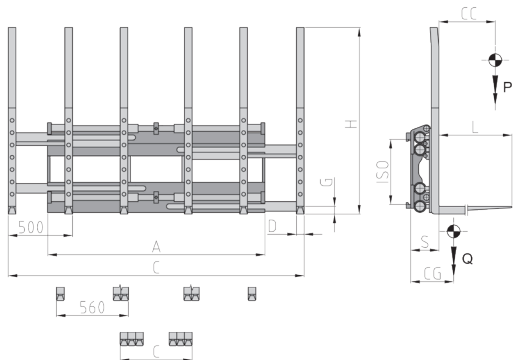

Model 918 allows to move one, two or three pallets side by side, small dimension of the frame ease operations in small spaces. The six bolt-on forks make the substitution easy and are supplied as standard with reinforced heel and load backrest.

REFERENCE	ATTACHMENT CAPACITY	LOAD CENTRE	ISO 2328 FEM	CARRIAGE WIDTH	OPENING RANGE		FORKS		THICKNESS		CENTER OF GRAVITY	WEIGHT
	P - Kg	CC - mm			C MIN - mm	C MAX - mm	DxGxL mm	H mm	S - mm	CG - mm		
15SH33A0001	3000	600	III	1630	560	2285	60x50x1150	1460	173	231	620	
15SH33A0002	3000	600	III	1795	560	2450	60x50x1150	1460	173	231	660	
15SJ53A0001	3600	600	III	1630	560	2285	60x60x1150	1460	173	236	715	
15SJ53A0002	3600	600	III	1795	560	2450	60x60x1150	1460	173	231	740	
15SJ53A0003	3600	600	III	2285	560	2940	60x60x1150	1460	173	221	860	



Hydraulic functions required: 1.
Maximum working pressure: 200 bar.

The references indicated on table are relative to standard attachments.
For the position of hydraulic connection see detail below.

