


# 980 CRANE JIB



Series 980 Crane Jibs are designed to move suspended loads through belts or chains.

REFERENCE	ATTACHMENTS CAPACITY	LOAD CENTRE	ISO 2328 FEM	WIDTH	HEIGHT	LENGTH	HOLE DISTANCE	AXIS - CENTRE DISTANCE	HOOK HEIGHT	CENTER OF GRAVITY		WEIGHT
	P - Kg	CC - mm		A - mm	H - mm	L - mm	I - mm	N - mm	C - mm	CG - mm	Q - Kg	
<b>45LBS2C003</b>	1500	500	II	480	900	1276	76	200	200	340	130	
<b>45LFA2C009</b>	2500	500	II	480	900	1376	76	200	200	390	160	
<b>45LHY3C007</b>	3500	500	III	480	1035	1476	76	200	200	410	230	
<b>45LLL3C001</b>	5000	500	III	480	1035	1476	76	200	200	430	260	
<b>45LRO4C001</b>	8000	600	IV	560	1305	1686	86	200	200	490	440	

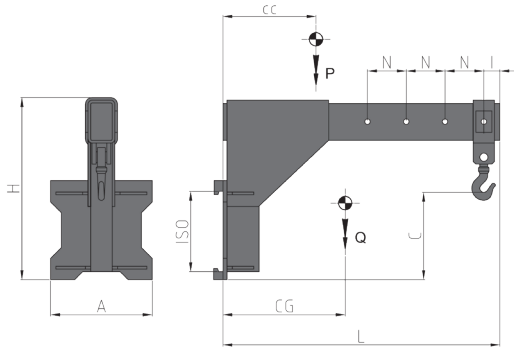

The combination of attachment and forklift must be homologated. The delivery of this attachment does not include the documents required for the homologation.

The references indicated on table are relative to standard attachments.