



Standard Equipment/Optional Equipment

Standard Equipment

- Hydrostatic power steering
- Linde twin accelerator pedals for all vehicle movements
- Central lever (joystick control) integrated into the adjustable armrest
- 2 x 12 kW maintenance free AC drive motors
- 25 kW AC maintenance free lift motor
- Different ECO modes providing the perfect combination of performance and efficiency
- Graphic display of battery operating time in minutes
- Automatic parking brake
- Linde dual motor drive
- Proportional reduction of travel speed when cornering (Linde Drive Assistant)
- Seamless electronic control of all traction and hydraulic movements
- Standard chassis suitable for working in ISO containers with appropriate mast
- Hydraulically adjustable full suspension PVC operator's seat with armrest
- Comprehensive digital instrument display

- Generous storage facilities for writing materials and miscellaneous items
- Superelastic tyres

- Mast**
- Clearview standard mast 3,100 mm lift
- Fork carriage width: 1,350 mm for all models
- Fork length 1,000 mm

Optional Equipment

- Single pedal accelerator with forward/reverse selector in the armrest
- Alternative fork lengths
- Alternative fork carriage widths
- Integrated sideshift
- Integrated fork spreader
- Tilt cylinder protection
- Load backrest
- One, two or three additional hydraulic circuits for attachments
- Polycarbonate top screen on overhead guard
- Front and rear screens, wipers and tops screen
- Full cab with hinged doors
- Overhead guard sun blinds (front + top)
- Heating (with pollen protection filter)
- Radio with CD player
- Fabric covered comfort seat
- Super-comfort seat with air suspension, heater and backrest extension
- Swivelling seat
- Integrated charger unit, optionally with electrolytic circulation
- Individual or single hydraulic control joystick
- Working lamps with LED technology
- Truck lighting with LED technology (only rear lights)

- Full road lighting
- Flashing beacon/rotating beacon
- Audible reversing alarm
- External, internal and panoramic mirror
- Clipboard with LED illumination
- Cold store protection
- Active ventilation for battery charging
- Alternative custom paintwork
- Linde Fleet Management (LFM)
- Alternative tyre types
- Electrical socket 12 V

Other options available on request



Electric Counterbalanced Trucks
Capacity 3500 - 5000 kg
E35, E40, E45, E50

Series 388

Safety

The protective overhead guard forms a strong and completely enclosed protective zone providing optimum structural integrity, safety and protection for the operator. The top mounted tilt cylinders provide seamless, smooth control of the tilt movements for excellent load stability in all operating conditions. This unique design also enables slimmer mast profiles to be fitted for outstanding visibility.

Performance

One would expect a high performance truck to have a high performance traction system – and that is exactly what the Linde compact drive axle and lift system delivers. Powerful motors and intelligent electronic control form an impressive power pack to deliver the highest level of productivity.

Comfort

Consistently high levels of performance and efficiency for extended periods are only possible if the operator feels comfortable. The ergonomic layout of all the controls, the adjustability of the armrest and seat, Linde Load Control, and twin accelerator pedals provide the best possible intuitive interface between the truck and the operator.

Features

- Linde compact drive axle**
- Twin drive design with high performance Linde AC technology
- Optimum energy efficiency
- Maintenance-free oil-bath vane brake
- Automatic parking brake
- Electronic components housed in sealed unit for complete protection

- Linde hydrostatic power steering**
- Minimal physical demands on the operator
- Compact ergonomically designed steering wheel
- Linde combi steer axle for outstanding manoeuvrability



- Linde twin accelerator control**
- Seamless, rapid reversing without repositioning the feet
- Short pedal travel
- Fatigue-free working
- Increased throughput and performance

- Linde Load Control**
- Small tactile joystick integrated in an adjustable armrest
- Precise and effortless fingertip joystick control of all mast functions
- Safe and highly efficient load handling

- Linde Dual Motor Drive**
- Two powerful AC drive motors integrated in the front axle
- Seamless acceleration and variable torque characteristics
- Extremely quiet in operation



- Linde operator's compartment**
- Ergonomically designed for efficient, fatigue-free working
- Spacious operator's compartment with generous floor plate area
- Cushioned comfort – mast and drive axle are isolated from the chassis and cab by a unique resilient suspension system that absorbs shock loadings



- Linde clearview mast design**
- with top mounted tilt cylinders for seamless load control and stability
- Excellent view of load and surroundings through the robust yet slim mast profiles
- Nominal capacity retained to maximum lift heights
- High residual capacities in all applications



- Linde energy management**
- Optimised energy consumption
- Accurate battery condition indicator
- Simple horizontal or vertical battery changing options
- Optional built-in high frequency charger for convenience and flexibility
- Record of battery usage




Reliability

An electric forklift truck depends on reliable electronic systems. The Linde electronic control system provides a high level of reliability because of its dual circuit monitoring system and the sealed aluminium housing which provides total protection for the electronics from the ingress of dust and moisture.

Productivity

Effective in operation, efficient in reducing costs: The unique Linde energy management system ensures intelligent and economical consumption of energy. Energy can also be obtained quickly utilising the optional built-in charging unit or one of the four simple and rapid battery changing methods. The result: more uptime and increased productivity.



Linde Material Handling GmbH, Postfach 100136, 63701 Aschaffenburg, Germany
Phone +49.6021.99-0, Fax +49.6021.99-1570, www.linde-mh.com, info@linde-mh.com



Technical Data according to VDI 2198

Characteristics	1.1	Manufacturer		LINDE	LINDE	LINDE	LINDE	LINDE	LINDE	LINDE	LINDE
	1.2	Model designation		E35/600H	E40/600H	E45/600H	E40/600HL	E45/600HL	E50HL	E40/600L	E45/600L
	1.3	Power unit		Battery	Battery	Battery	Battery	Battery	Battery	Battery	Battery
	1.4	Operation		Seat	Seat	Seat	Seat	Seat	Seat	Seat	Seat
	1.5	Load capacity	Q (t)	3.5	4.0	4.5	4.0	4.5	5.0	4.0	4.5
Weights	1.6	Load centre	c (mm)	600	600	600	600	600	500	600	500
	1.8	Axle centre to fork face	x (mm)	538	548	548	548	548	548	548	548
	1.9	Wheelbase	y (mm)	1905	1905	1905	2050	2050	2050	2050	2050
	2.1	Service weight	(kg)	6875 ¹⁾	7360 ¹⁾	7870 ¹⁾	7285 ¹⁾	7740 ¹⁾	7895 ¹⁾	7435 ¹⁾	7890 ¹⁾
	2.2	Axle load with load, front/rear	(kg)	9351 / 1024	10235 / 1125	11057 / 1313	10230 / 1055	11025 / 1215	11566 / 1329	10410 / 1025	11205 / 1185
Wheels/Tyres	2.3	Axle load without load, front/rear	(kg)	3760 / 3115 ¹⁾	3825 / 3535 ¹⁾	3845 / 4025 ¹⁾	3990 / 3295 ¹⁾	4005 / 3735 ¹⁾	4010 / 3885 ¹⁾	4170 / 3265 ¹⁾	4185 / 3705 ¹⁾
	3.1	Tyres rubber, SE, pneumatic, polyurethane		SE	SE	SE	SE	SE	SE	SE	SE
	3.2	Tyre size, front		355/45-15 (28x12.5-15)	355/45-15 (28x12.5-15)	355/45-15 (28x12.5-15)	355/45-15 (28x12.5-15)	355/45-15 (28x12.5-15)	355/45-15 (28x12.5-15)	355/45-15 (28x12.5-15)	355/45-15 (28x12.5-15)
	3.3	Tyre size, rear		225/75-10 (23x9-10)	225/75-10 (23x9-10)	225/75-10 (23x9-10)	225/75-10 (23x9-10)	225/75-10 (23x9-10)	225/75-10 (23x9-10)	225/75-10 (23x9-10)	225/75-10 (23x9-10)
	3.5	Wheels, number front/rear (x = driven)		2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2
Dimensions	3.6	Track width, front	b10 (mm)	1149	1149	1149	1149	1149	1149	1149	1149
	3.7	Track width, rear	b11 (mm)	932	932	932	932	932	932	932	932
	4.1	Mast/fork carriage tilt, forward/backward	a/b (°)	5.0 / 8.0	5.0 / 8.0	5.0 / 8.0	5.0 / 8.0	5.0 / 8.0	5.0 / 8.0	5.0 / 8.0	5.0 / 8.0
	4.2	Height of mast, lowered	h1 (mm)	2433	2433	2433	2433	2433	2160	2160	2160
	4.3	Free lift	h2 (mm)	150	150	150	150	1260	1260	1260	1260
Performance	4.4	Lift	h3 (mm)	3100	3100	3100	3100	3100	4075	4075	4075
	4.5	Height of mast, extended	h4 (mm)	4000	4000	4000	4000	4000	4975	4975	4975
	4.7	Height of overhead guard (cabin)	h6 (mm)	2360	2360	2360	2360	2360	2220	2220	2220
	4.8	Height of seat/stand-on platform	h7 (mm)	1230	1230	1230	1230	1230	1155	1155	1155
	4.12	Towing coupling height	h10 (mm)	722	722	722	722	722	722	722	722
	4.19	Overall length	l1 (mm)	3712	3722	3722	3867	3867	3867	3867	3867
	4.20	Length to fork face	l2 (mm)	2712	2722	2867	2867	2867	2867	2867	2867
	4.21	Overall width	b1/b2 (mm)	1440 / 1278	1440 / 1278	1440 / 1278	1440 / 1278	1440 / 1278	1440 / 1278	1440 / 1278	1440 / 1278
	4.22	Fork dimensions	s/e/l (mm)	50 x 120 x 1000	60 x 130 x 1000	60 x 130 x 1000	60 x 130 x 1000	60 x 130 x 1000	60 x 130 x 1000	60 x 130 x 1000	60 x 130 x 1000
	4.23	Fork carriage to ISO 2328, class/type A, B		3A	3A	3A	3A	3A	3A	3A	3A
	4.24	Width of fork carriage	b3 (mm)	1350	1350	1350	1350	1350	1350	1350	1350
	4.31	Ground clearance, below mast	m1 (mm)	146	145	144	145	144	145	144	143
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	160	160	160	160	160	160	160	160
	4.33	Aisle width with pallet 1000 x 1200 across forks	Ast (mm)	3954 ²⁾	3964 ²⁾	3984 ²⁾	4109 ²⁾	4109 ²⁾	4109 ²⁾	4109 ²⁾	4109 ²⁾
	4.34	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	4154 ²⁾	4164 ²⁾	4184 ²⁾	4309 ²⁾	4309 ²⁾	4309 ²⁾	4309 ²⁾	4309 ²⁾
Drive	4.35	Turning radius	Wa (mm)	2216	2216	2236	2361	2361	2361	2361	2361
	4.36	Minimum pivoting point distance	b13 (mm)	580	580	580	580	580	580	580	580
	5.1	Travel speed, with/without load	(km/h)	20 / 20	20 / 20	20 / 20	20 / 20	20 / 20	20 / 20	20 / 20	20 / 20
	5.2	Lifting speed, with/without load	(m/s)	0.45 / 0.56	0.42 / 0.56	0.39 / 0.56	0.42 / 0.56	0.39 / 0.56	0.35 / 0.5	0.42 / 0.56	0.39 / 0.56
	5.3	Lowering speed, with/without load	(m/s)	0.55 / 0.55	0.55 / 0.55	0.55 / 0.55	0.55 / 0.55	0.55 / 0.55	0.55 / 0.55	0.55 / 0.55	0.55 / 0.55
	5.5	Tractive force, with/without load	(N)	4600 / 4600	4600 / 4600	4600 / 4600	4600 / 4600	4600 / 4600	4600 / 4600	4600 / 4600	4600 / 4600
	5.6	Maximum tractive force, with/without load	(N)	19000 / 19000	19000 / 19000	19000 / 19000	19000 / 19000	19000 / 19000	19000 / 19000	19000 / 19000	19000 / 19000
	5.7	Climbing ability, with/without load	(%)	6.0 / 9.1	5.5 / 8.5	5.0 / 7.9	5.5 / 8.6	5.1 / 8.1	4.8 / 7.9	5.5 / 8.6	5.1 / 8.1
	5.8	Maximum climbing ability, with/without load	(%)	19.0 / 29.4	17.3 / 27.3	15.9 / 25.4	17.4 / 27.6	16.0 / 25.8	15.2 / 25.3	17.4 / 27.6	16.0 / 25.8
	5.9	Acceleration time, with/without load	(s)	4.5 / 4.2	4.7 / 4.2	4.9 / 4.2	4.7 / 4.2	4.9 / 4.2	5.2 / 4.2	4.7 / 4.2	4.9 / 4.2
Others	5.10	Service brake		hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.	hydr./mech.
	6.1	Drive motor, 60 minute rating	(kW)	2x 11.9	2x 11.9	2x 11.9	2x 11.9	2x 11.9	2x 11.9	2x 11.9	2x 11.9
	6.2	Lift motor rating at S3 15%	(kW)	25	25	25	25	25	25	25	25
	6.3	Battery according to DIN 43531/35/36 A,B,C,no		43 536 / A	43 536 / A	43 536 / A	43 536 / A	43 536 / A	43 536 / A	43 536 / A	43 536 / A
	6.4	Battery voltage/rated capacity (5h)	(V/Ah)	80 / 700-775	80 / 700-775	80 / 700-775	80 / 840	80 / 840	80 / 840	80 / 840	80 / 840
	6.5	Battery weight (± 5%)	(kg)	1863	1863	1863	2180	2180	2180	2180	2180


1) Figures with battery, see line 6.4/6.5.

2) Including a 200 mm (min.) operating aisle clearance.


Load Capacity Diagrams

valid for standard mast with SE tyres 28x12.5-15 and fork carriage


E 35/600 H

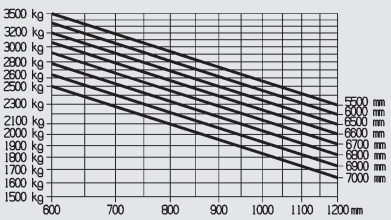




E 40/600 H, E 40/600 HL

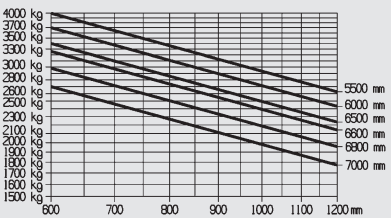

E 45/600 H, E 45/600 HL

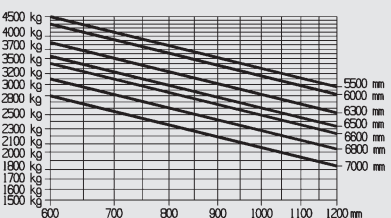

E 50 HL

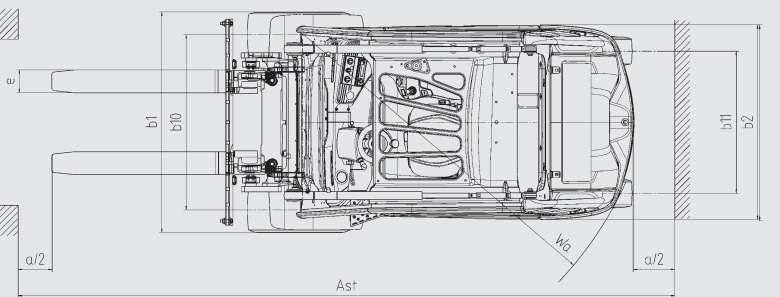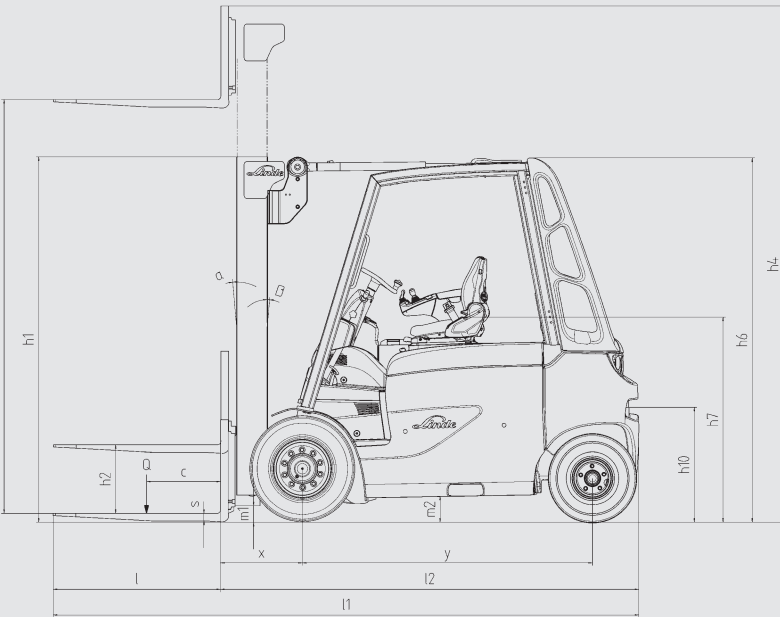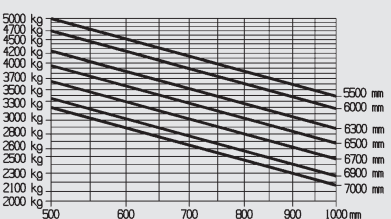

Standard mast		E35/600H E40/600H					E40/600HL E45/600H E45/600HL E50HL				
Lift	h3	3100	3700	4100	4400	5000	3100	3700	4100	4400	5000
Mast retracted *	h1	2433	2733	2933	3083	3383	2433	2733	2933	3083	3383
Mast extended	h4	3800	4400	4800	5100	5700	4000	4600	5000	5300	5900
Free lift	h2	150	150	150	150	150	150	150	150	150	150

Triplex mast		E35/600H E40/600H			E40/600HL E45/600H E45/600HL E50HL		
Lift	h3	4675	5515	6015	4675	5515	6015
Mast retracted	h1	2360	2660	3060	2360	2660	3060
Mast extended	h4	5375	6215	7315	5575	6415	7515
Free lift	h2	1660	1960	2360	1460	1760	2160

Figures in mm
Figures for other equipments and triplex masts on request